

EVO-TP

Model 2018

CERTIFICATION DATA:

ETL/cETL/DLC Listed

IP 65 Housing

IK 08

RoHS

FULL CUT OFF

TYPE IV/TYP V

LIGHTING PATTERNS:



ENERGY DATA:

Electronic LED Driver

>0.9 Power Factor

<20% Total Harmonic Distortion



100-277V 50/60Hz, 347V/60Hz,

480V/60Hz

-35°C Minimum Temperature

50°C Ambient Temperature Rating

- Patent design.
- Easy installation way .
- Uniquely designed rim on housing focusing light beam.
- Aluminum baking varnish with housing and lamp-standard.
- High Brightness with long life.
- High degree of protection.
- FULL CUT OFF.
- TYPE IV/TYP V:



www.migdal-or.org

www.Migdal-or.org




EVO-TP

Model 2018

	UNIT	EVC-TP-C-W10	EVC-TP-C-W20	EVC-TP-C-W30
Rated Power	V	10	20	30
Input Voltage	V	AC100-277	AC100-277	AC100-277
Frequency Range	Hz	50/60	50/60	50/60
Luminous Flux	lm	900	1800	2700
Color Temperature	K	3000-6500	3000-6500	3000-6500
Protection Grade	...	IP65	IP65	IP65
CRI	...	>70	>70	>70
L70 LIFESPAN	H	>50,000	>50,000	>50,000
Temperature of Working Condition		-35°C~50°C	-35°C~50°C	-35°C~50°C
Humidity of Working Condition		10%~90%	10%~90%	10%~90%
THD	%	<15	<15	<15
Power Factor	...	>0.9	>0.9	>0.9
Lamp Weight-D60	KG	1.9	2	2.1
Lamp Weight-D76	KG	1.8	1.9	2
Packing Size	mm	410x410x315		

DIMENSIONS
UNIT: INCH/[MM]

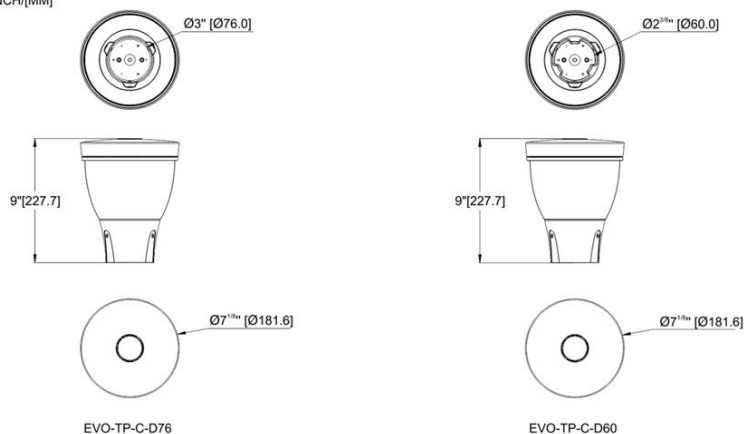

www.migdal-or.org

www.Migdal-or.org



EVO-TP

Model 2018

- Patent design.
- Easy installation way .
- Uniquely designed rim on housing focusing light beam.
- Aluminum baking varnish with housing and lamp-standard.
- High Brightness with long life.
- High degree of protection.
- FULL CUT OFF.
- TYPE IV/TYP E V:

CERTIFICATION DATA:

ETL/cETL/DLC Listed
IP 65 Housing
IK 08
RoHS
FULL CUT OFF
TYPE IV/TYP E V

LIGHTING PATTERNS:



ENERGY DATA:

Electronic LED Driver
>0.9 Power Factor
<20% Total Harmonic Distortion
100-277V 50/60Hz, 347V/60Hz,
480V/60Hz
-35°C Minimum Temperature
50°C Ambient Temperature Rating



www.migdal-or.org

www.Migdal-or.org




EVO-TP

Model 2018

	UNIT	EV C-TP-S-W10	EV C-TP-S-W20	EV C-TP-S-W30
Rated Power	W	10	20	30
Input Voltage	V	AC100-277	AC100-277	AC100-277
Frequency Range	Hz	50/60	50/60	50/60
Luminous Flux	lm	900	1800	2700
Color Temperature	K	3000-6500	3000-6500	3000-6500
Protection Grade	...	IP65	IP65	IP65
CRI	...	>70	>70	>70
L70 LIFESPAN	H	>50,000	>50,000	>50,000
Temperature of Working Condition		-35°C~50°C	-35°C~50°C	-35°C~50°C
Humidity of Working Condition		10%~90%	10%~90%	10%~90%
THD	%	<15	<15	<15
Power Factor	...	>0.9	>0.9	>0.9
Lamp Weight-D60	KG	1.9	2	2.1
Lamp Weight-D76	KG	1.8	1.9	2
Packing Size	mm	410x410x315		

DIMENSIONS
UNIT: INCH/[MM]

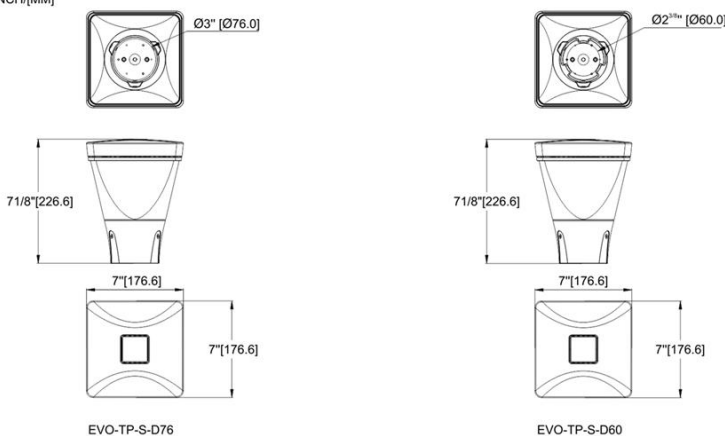

www.migdal-or.org

www.Migdal-or.org