

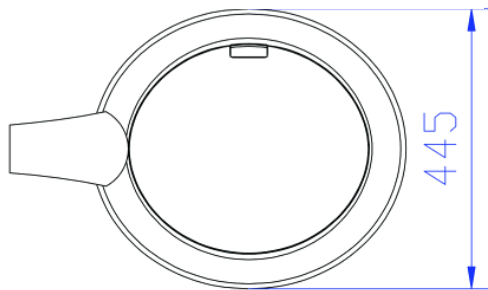



ORANIA LED25B

Model	Led Qty(PCS)	Input Voltage	Rated Power(w)	Color Temperature(k)	Luminous Flux(lm)	Ambient Temperature	Ambient Humidity	Powe Factor	IP Ratio
LED - 25B	48	Ac90~305v/50~60Hz	40	6000/4000/3000	4000	-25°---50°	10%-90%	>0.95	IP65
LED - 25B	72	Ac90~305v/50~60Hz	60	6000/4000/3000	6000	-25°---50°	10%-90%	>0.95	IP65
LED - 25B	96	Ac90~305v/50~60Hz	80	6000/4000/3000	8000	-25°---50°	10%-90%	>0.95	IP65
LED - 25B	108	Ac90~305v/50~60Hz	100	6000/4000/3000	10000	-25°---50°	10%-90%	>0.95	IP65


0-10V dimming available

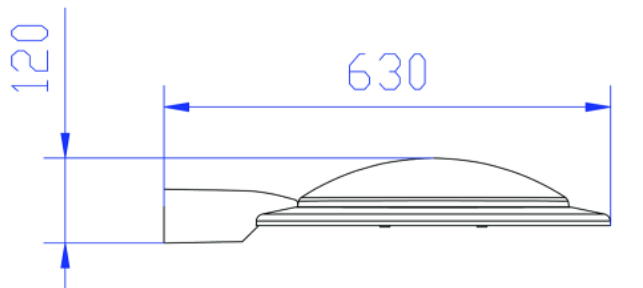


48 LEDS



72 LEDS




96 LEDS



108 LEDS

Polar diagram SPACE-LED25B /60W (60W)/Cone measurement Intensity(cd/1000lm) Polar diagram

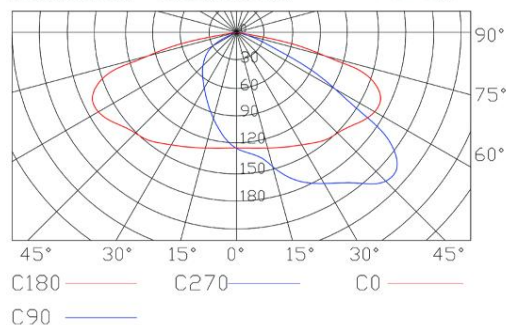

www.migdal-or.org

מגדל אור הנדסת תאורה



RAL 9006



RAL 7015



Dark grey Matt

Hans Moler 37, Kiriath Bialik

www.migdal-or.org

Tel. 04-8525244 Fax. 04-8525245